

Product: MICRO-S surface mounted LED downlight




**Description:**

With anti glare technology this surface mounted light will be welcome in any interior.  
 A range of ring and diffuser colours will also mean this works with your interior scheme.  
 A higher lumen package than the NANO built for good illumination of the subject matter

**Physical attributes:**

Width: 77mm diameter  
 Cutout: none  
 Height: 135mm  
 Ceiling type: any  
 Mounting type: Surface  
 Colour finish: white or black  
 Dimming protocol: DALI, mains, 1-10v

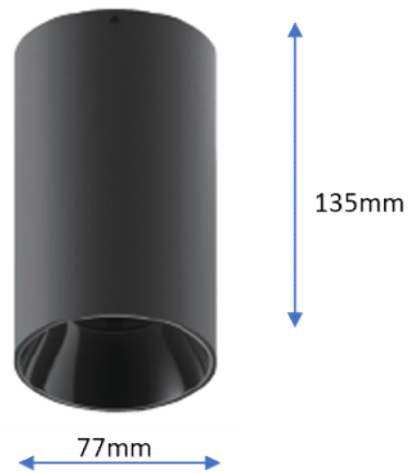

**Lighting attributes:**

LED manufacturer: CREE  
 Driver manufacturer: Tridonic  
 Optics: Clear  
 Lumen output: 750 lumens  
 Power consumption: 11w  
 Colour temperature: 3000K, 4000K  
 Colour consistency: <3 Std MacAdam  
 Colour rendering: Ra>90  
 Rated LED lifetime: 50,000 hours  
 Emergency pack type: None  
 Warranty: 5 years  
 Beam Angle options: 34 degrees



Efficiency in luminaire lumens per circuit watt: **69**

