

Product: BREVIS-SR LED downlight




Description:

The Brevis R (Recessed Light Source) is 121mm square medium area downlight which can be surface (Standard) or suspended mounted. The heatsink is built into the body of the product which enables the downlight to run at cool temperatures without the common need for vents in the vertical walls. The downlight also has an IP20 rating when surface mounted.


Physical attributes:

Width: 121mm
 Length: 121mm
 Height: 131mm
 Ceiling type: any
 Mounting type: Surface
 Colour finish: white or black
 Dimming protocol: DALI or switching

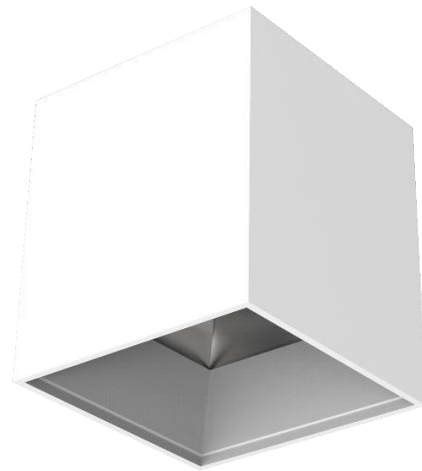

Lighting attributes:

LED manufacturer: Bridgelux
 Driver manufacturer: Meanwell
 Optics: Clear
 Lumen output: 1450 or 1990 lumens
 Power consumption: 15w or 20 watts
 Colour temperature: 3000K, 4000K
 Colour consistency: <3 Std MacAdam
 Colour rendering: Ra>80
 Rated LED lifetime: 50,000 hours
 Emergency pack type: None
 Warranty: 5 years
 Beam angle: 38 degrees

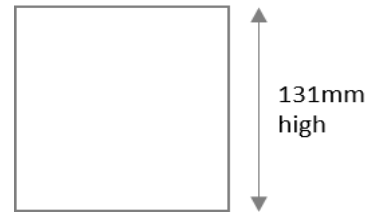

Efficiency in luminaire lumens per circuit watt: **97**

