

Product: BREVIS-SRC LED downlight



LED

**Description:**

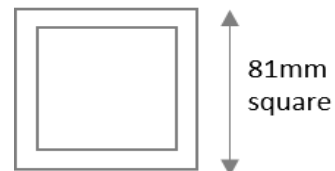
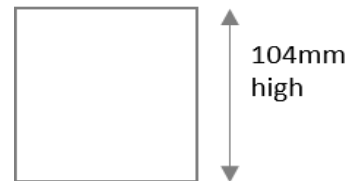
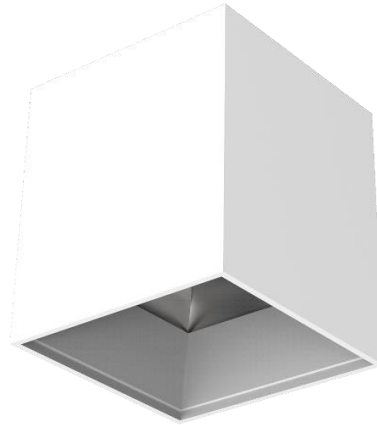
The Brevis R (Recessed Light Source) is a 81mm square small area downlight which can be surface (Standard) or suspended mounted. The heatsink is built into the body of the product which enables the downlight to run at cool temperatures without the common need for vents in the vertical walls. The downlight also has an IP20 rating when surface mounted.

Physical attributes:

Width:	81mm
Length:	81mm
Height:	104mm
Ceiling type:	any
Mounting type:	Surface
Colour finish:	white or black
Dimming protocol:	DALI or switching

Lighting attributes:

LED manufacturer:	Bridgelux
Driver manufacturer:	Meanwell
Optics:	Clear
Lumen output:	948 or 1450 lumens
Power consumption:	10w or 15 watts
Colour temperature:	3000K, 4000K
Colour consistency:	<3 Std MacAdam
Colour rendering:	Ra>80
Rated LED lifetime:	50,000 hours
Emergency pack type:	None
Warranty:	5 years
Beam angle:	60 degrees

Efficiency in luminaire lumens per circuit watt: **97**