

Product: BURST LED downlight



Description:

A standard sized commercial downlight packing a UGR<19 rating and high efficiency of >100 lm/cw.
 An extremely versatile downlight with varying IP rated options and reflector colours to choose from.
 IP44/65 versions also available
 UGR<19 with 65 degree cutoff viewing angle


Physical attributes:

- Width: 188mm diameter
- Cutout: 160mm
- Height: 80mm
- Ceiling type: any
- Mounting type: Recessed
- Colour finish: white
- Dimming protocol: DALI or switching





Lighting attributes:

- LED manufacturer: Bridgelux
- Driver manufacturer: Philips
- Optics: Frosted opal
- Lumen output: 1570, 2050lm, 2500lm
- Power consumption: 15w, 20w, 25w
- Colour temperature: 3000K, 4000K
- Colour consistency: <3 Std MacAdam
- Colour rendering: Ra>80
- Rated LED lifetime: 50,000 hours
- Emergency pack type: None
- Warranty: 5 years
- Beam angle: 90 degrees

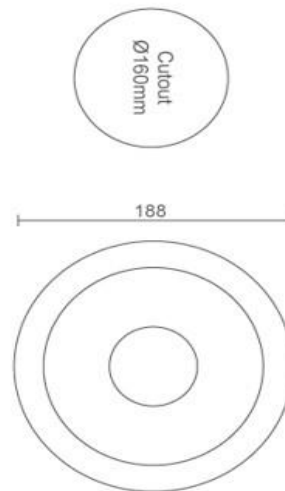

Efficiency in luminaire lumens per circuit watt: **101**

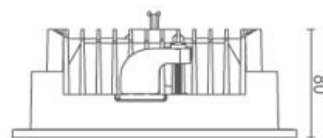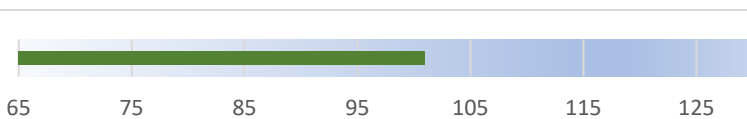

Lighting data sheet