

Product: PRO LINE surface /suspended linear lighting
down light only with nano optics



Description:

A high quality linear profile with down light only. Optics are nao prsim optics giving an UGR rating of less than 19. Profile can be finished in any RAL colour your project requires. Standard lengths from 565mm to 2245mm with longer lengths on request. Shortest profile with emergency gear is 900mm long. Suitable for commercial, residential or school applications. The nano-coating optics to improve lumen output, but also support continuous installation. The diffuser could be supplied independently as a continuous 30-metre PC roll for easy installation of a seamless continuous linear lighting line.

Physical attributes:

Width: 50mm
Length: 565mm to 2245mm
Height: 70mm

Mounting type: Surface or suspended
Colour finish: White or Black
Dimming protocol: DALI or switching



Lighting attributes:

LED manufacturer: Philips
Driver manufacturer: Philips
Optics: Nano optics UGR<19
Lumen output: 3100 to 11300lm
Power consumption: 30w to 122w
Colour temperature: 3000K or 4000K
Colour consistency: <3 Std MacAdam
Colour rendering: Ra>80
Rated LED lifetime: 50,000 hours

Warranty: 5 years



Shown above with optional end infills

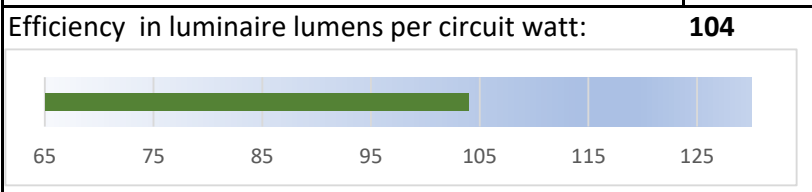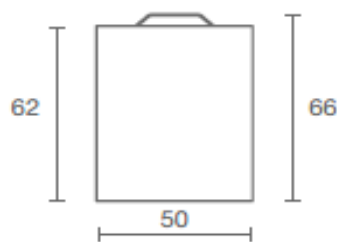

info@silent.design

www.silent.design

Lighting data sheet