

Product: PRO LINE surface /suspended linear lighting  
down light only with opal optics



LED 

**Description:**

A high quality linear profile with down light only. Optics are opal giving an even illuminated line of light. Profile can be finished in any RAL colour your project requires. Standard lengths from 565mm to 2245mm with longer lengths on request. Shortest profile with emergency gear is 900mm long.

Suitable for commercial, residential or school applications. The opal optics have good lumen output, but also support continuous installation. The diffuser could be supplied independently as a continuous 30-metre PC roll for easy installation of a seamless continuous linear lighting line.

**Physical attributes:**

Width: 50mm  
Length: 565mm to 2245mm  
Height: 70mm

Mounting type: Surface or suspended  
Colour finish: White or Black  
Dimming protocol: DALI or switching

**Lighting attributes:**



LED manufacturer: Philips  
Driver manufacturer: Philips  
Optics: Opal  
Lumen output: 2950 to 10900lm  
Power consumption: 30w to 122w  
Colour temperature: 3000K or 4000K  
Colour consistency: <3 Std MacAdam  
Colour rendering: Ra>80  
Rated LED lifetime: 50,000 hours

Warranty: 5 years



Example shown above with PIR infill

Efficiency in luminaire lumens per circuit watt: **97**

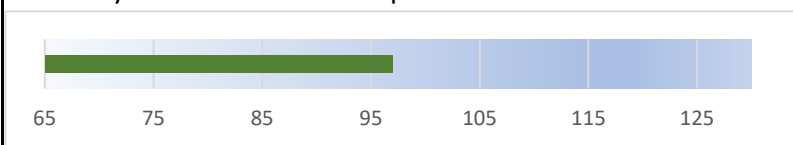

[info@silent.design](mailto:info@silent.design)

[www.silent.design](http://www.silent.design)

## Lighting data sheet