

Product: PRO LINE suspended linear lighting
up and down light with opal optics



LED

Description:

A high quality linear profile with up and down light and a 70 /30 split. Optics are opal giving an even illuminated line of light. Profile can be finished in any RAL colour your project requires. Standard lengths from 565mm to 2245mm with longer lengths on request. Shortest profile with emergency gear is 900mm long.

Suitable for commercial, residential or school applications. The opal optics have good lumen output, but also support continuous installation. The diffuser could be supplied independently as a continuous 30-metre PC roll for easy installation of a seamless continuous linear lighting line.

Physical attributes:


Width: 50mm
Length: 565mm to 2245mm
Height: 70mm

Mounting type: Surface or suspended
Colour finish: White or Black
Dimming protocol: DALI or switching

Lighting attributes:



LED manufacturer: Philips
Driver manufacturer: Philips
Optics: Opal
Lumen output: 2950 to 10900lm
Power consumption: 30w to 122w
Colour temperature: 3000K or 4000K
Colour consistency: <3 Std MacAdam
Colour rendering: Ra>80
Rated LED lifetime: 50,000 hours

Warranty: 5 years

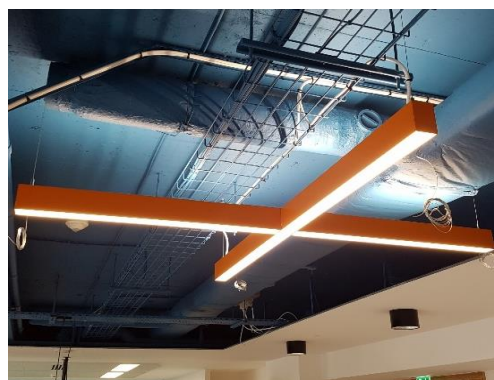

An example of lighting shapes that can be achieved with the PRO LINE

Efficiency in luminaire lumens per circuit watt: **97**

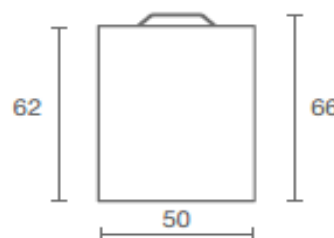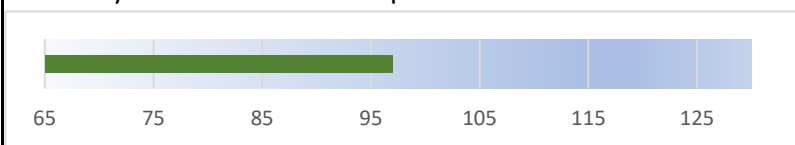

info@silent.design

www.silent.design

Lighting data sheet