

Product: PRO LINE suspended linear lighting
up and down light with louvre



Description:

A high quality linear profile with up and down light. It has a 30% up and 70% down light split. Optics are an Anti-Glare Louvre finished in either silver or black giving an UGR rating of less than 19.

Profile can be finished in any RAL colour your project requires. Standard lengths from 565mm to 2245mm with longer lengths on request. Shortest profile with emergency gear is 900mm long.

Suitable for commercial, residential or school applications.

Physical attributes:

Width: 50mm
Length: 565mm to 2245mm
Height: 70mm

Mounting type: Surface or suspended
Colour finish: White or Black
Dimming protocol: DALI or switching

Lighting attributes:

LED manufacturer: Philips
Driver manufacturer: Philips
Optics: Louvre UGR<19
Lumen output: 2500 to 9300lm
Power consumption: 30w to 122w
Colour temperature: 3000K or 4000K
Colour consistency: <3 Std MacAdam
Colour rendering: Ra>80
Rated LED lifetime: 50,000 hours

Warranty: 5 years



LOUVRE AND BODY OPTIONS



BB – Black with black louvre



BS-Black with silver louvre




WB-White with black louvre



WS-White with silver louvre

Efficiency in luminaire lumens per circuit watt: **93**

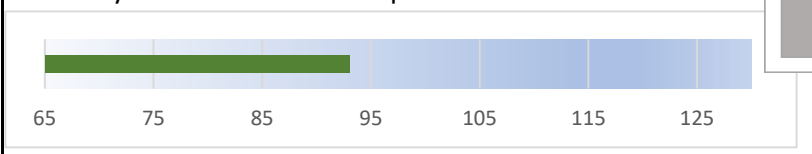

info@silent.design

www.silent.design

Lighting data sheet